



LUBE PUMP MOTOR PART 1-12 850
R.P.M. MUST BE INTERLOCKED
WITH STARTER ON DRIVE MOTOR
SO THAT CENTRIFUGAL CANNOT BE
STARTED WITHOUT LUBRICATION
PUMP RUNNING

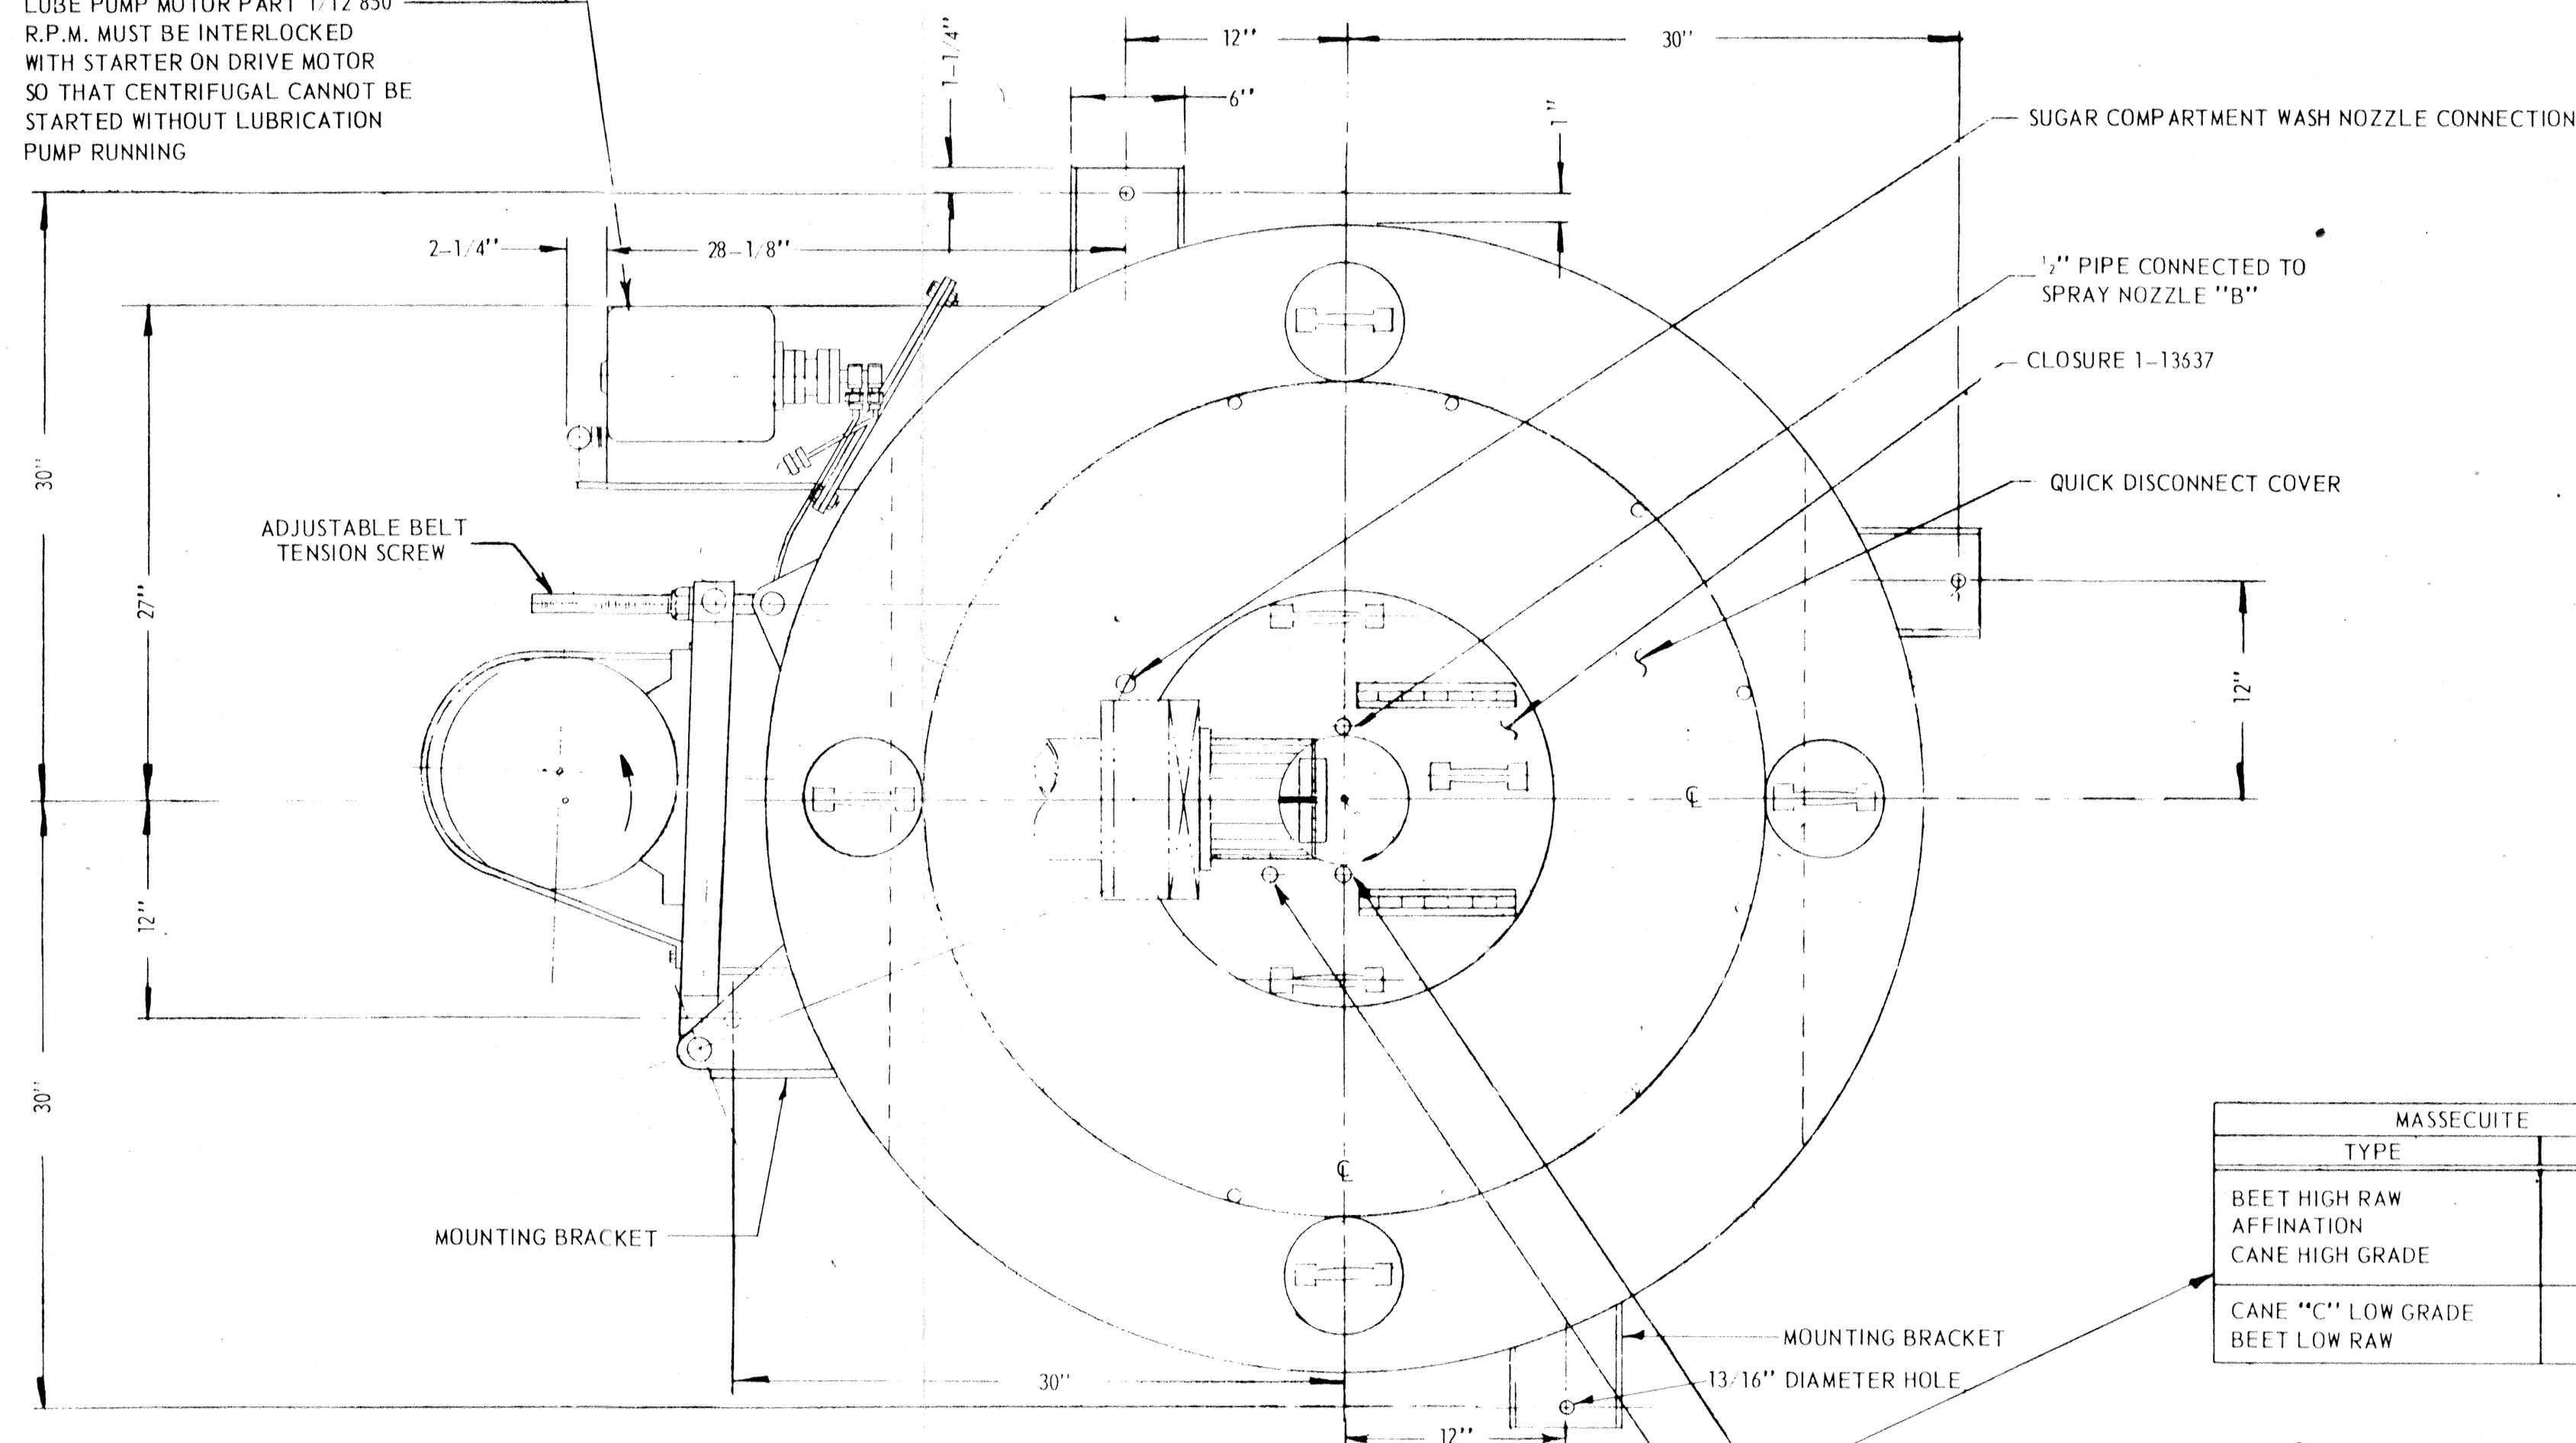

MASSECUTE		DIM. "A"
TYPE	CONDITION	
BEET HIGH RAW AFFINATION CANE HIGH GRADE	FLUID	16 1/2"
CANE "C" LOW GRADE BEET LOW RAW	VISCOUS	26"


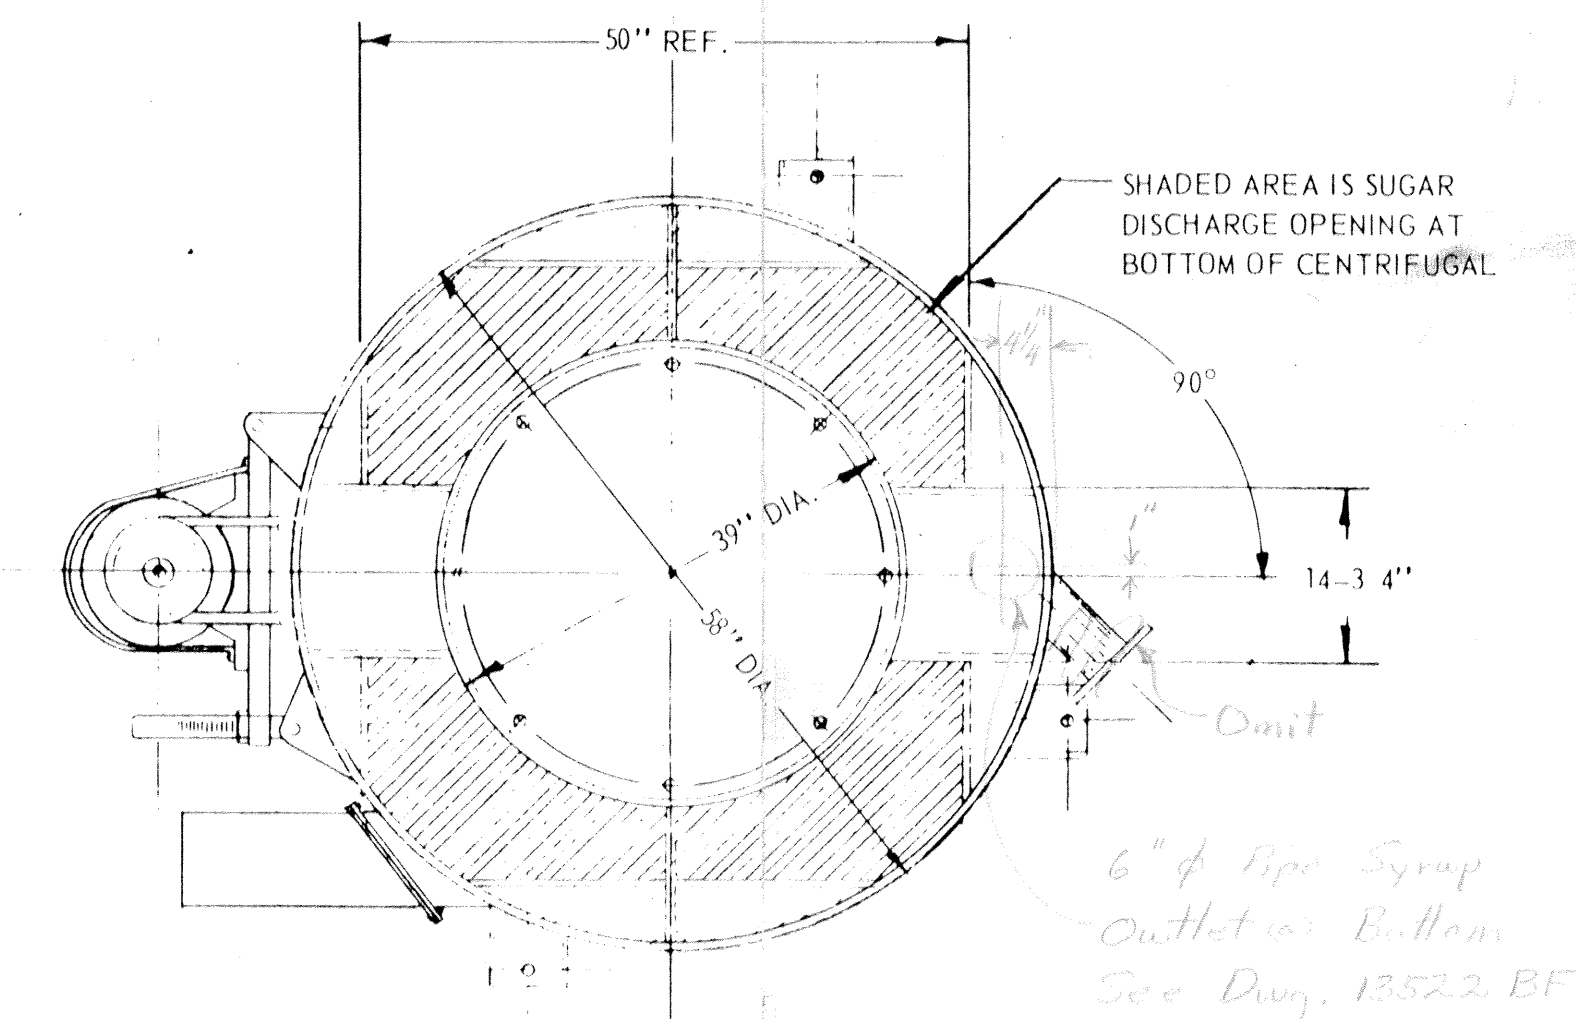


VIEW A-A

MOLASSES COMPARTMENT
STEAM WASH NOZZLE CONNECTION
60-80 PSIG STEAM - 1.4" I.P.S.
NOTE: DO NOT USE WHILE
BASKET IS ROTATING

HP	PART NO.
30	40-16861
40	41-16861

DRIVE MOTOR - 1800 RPM TEFC

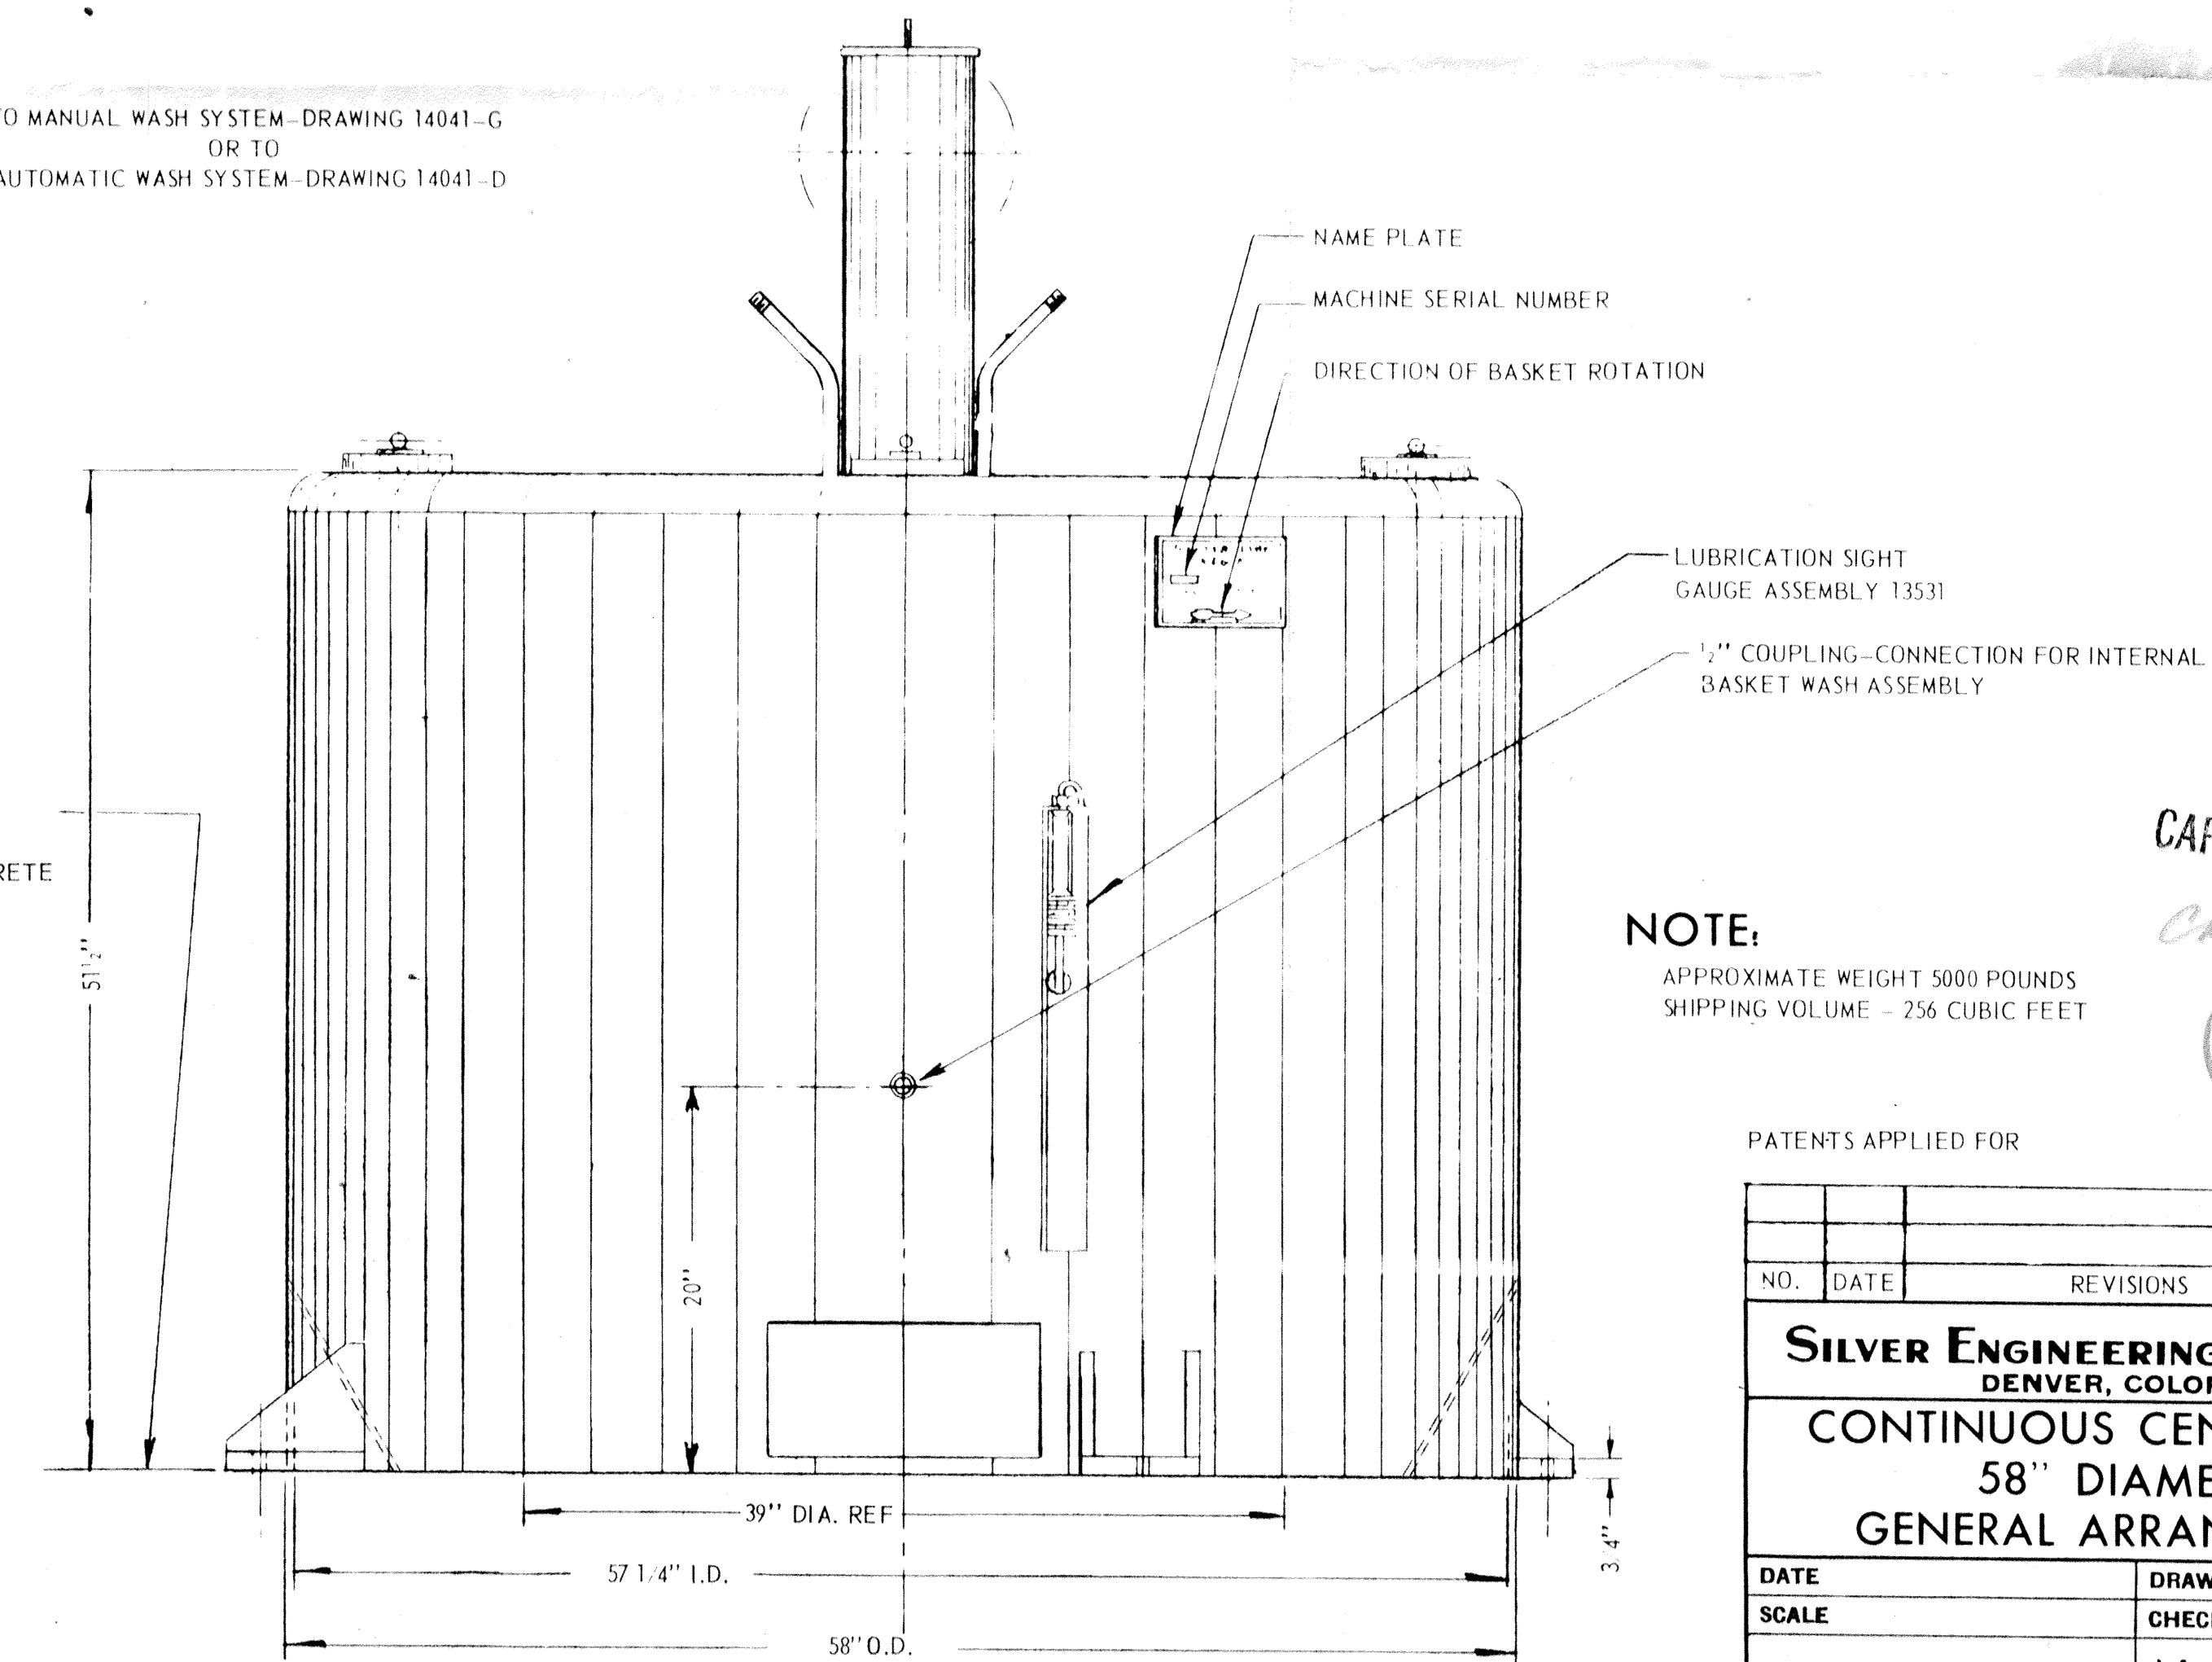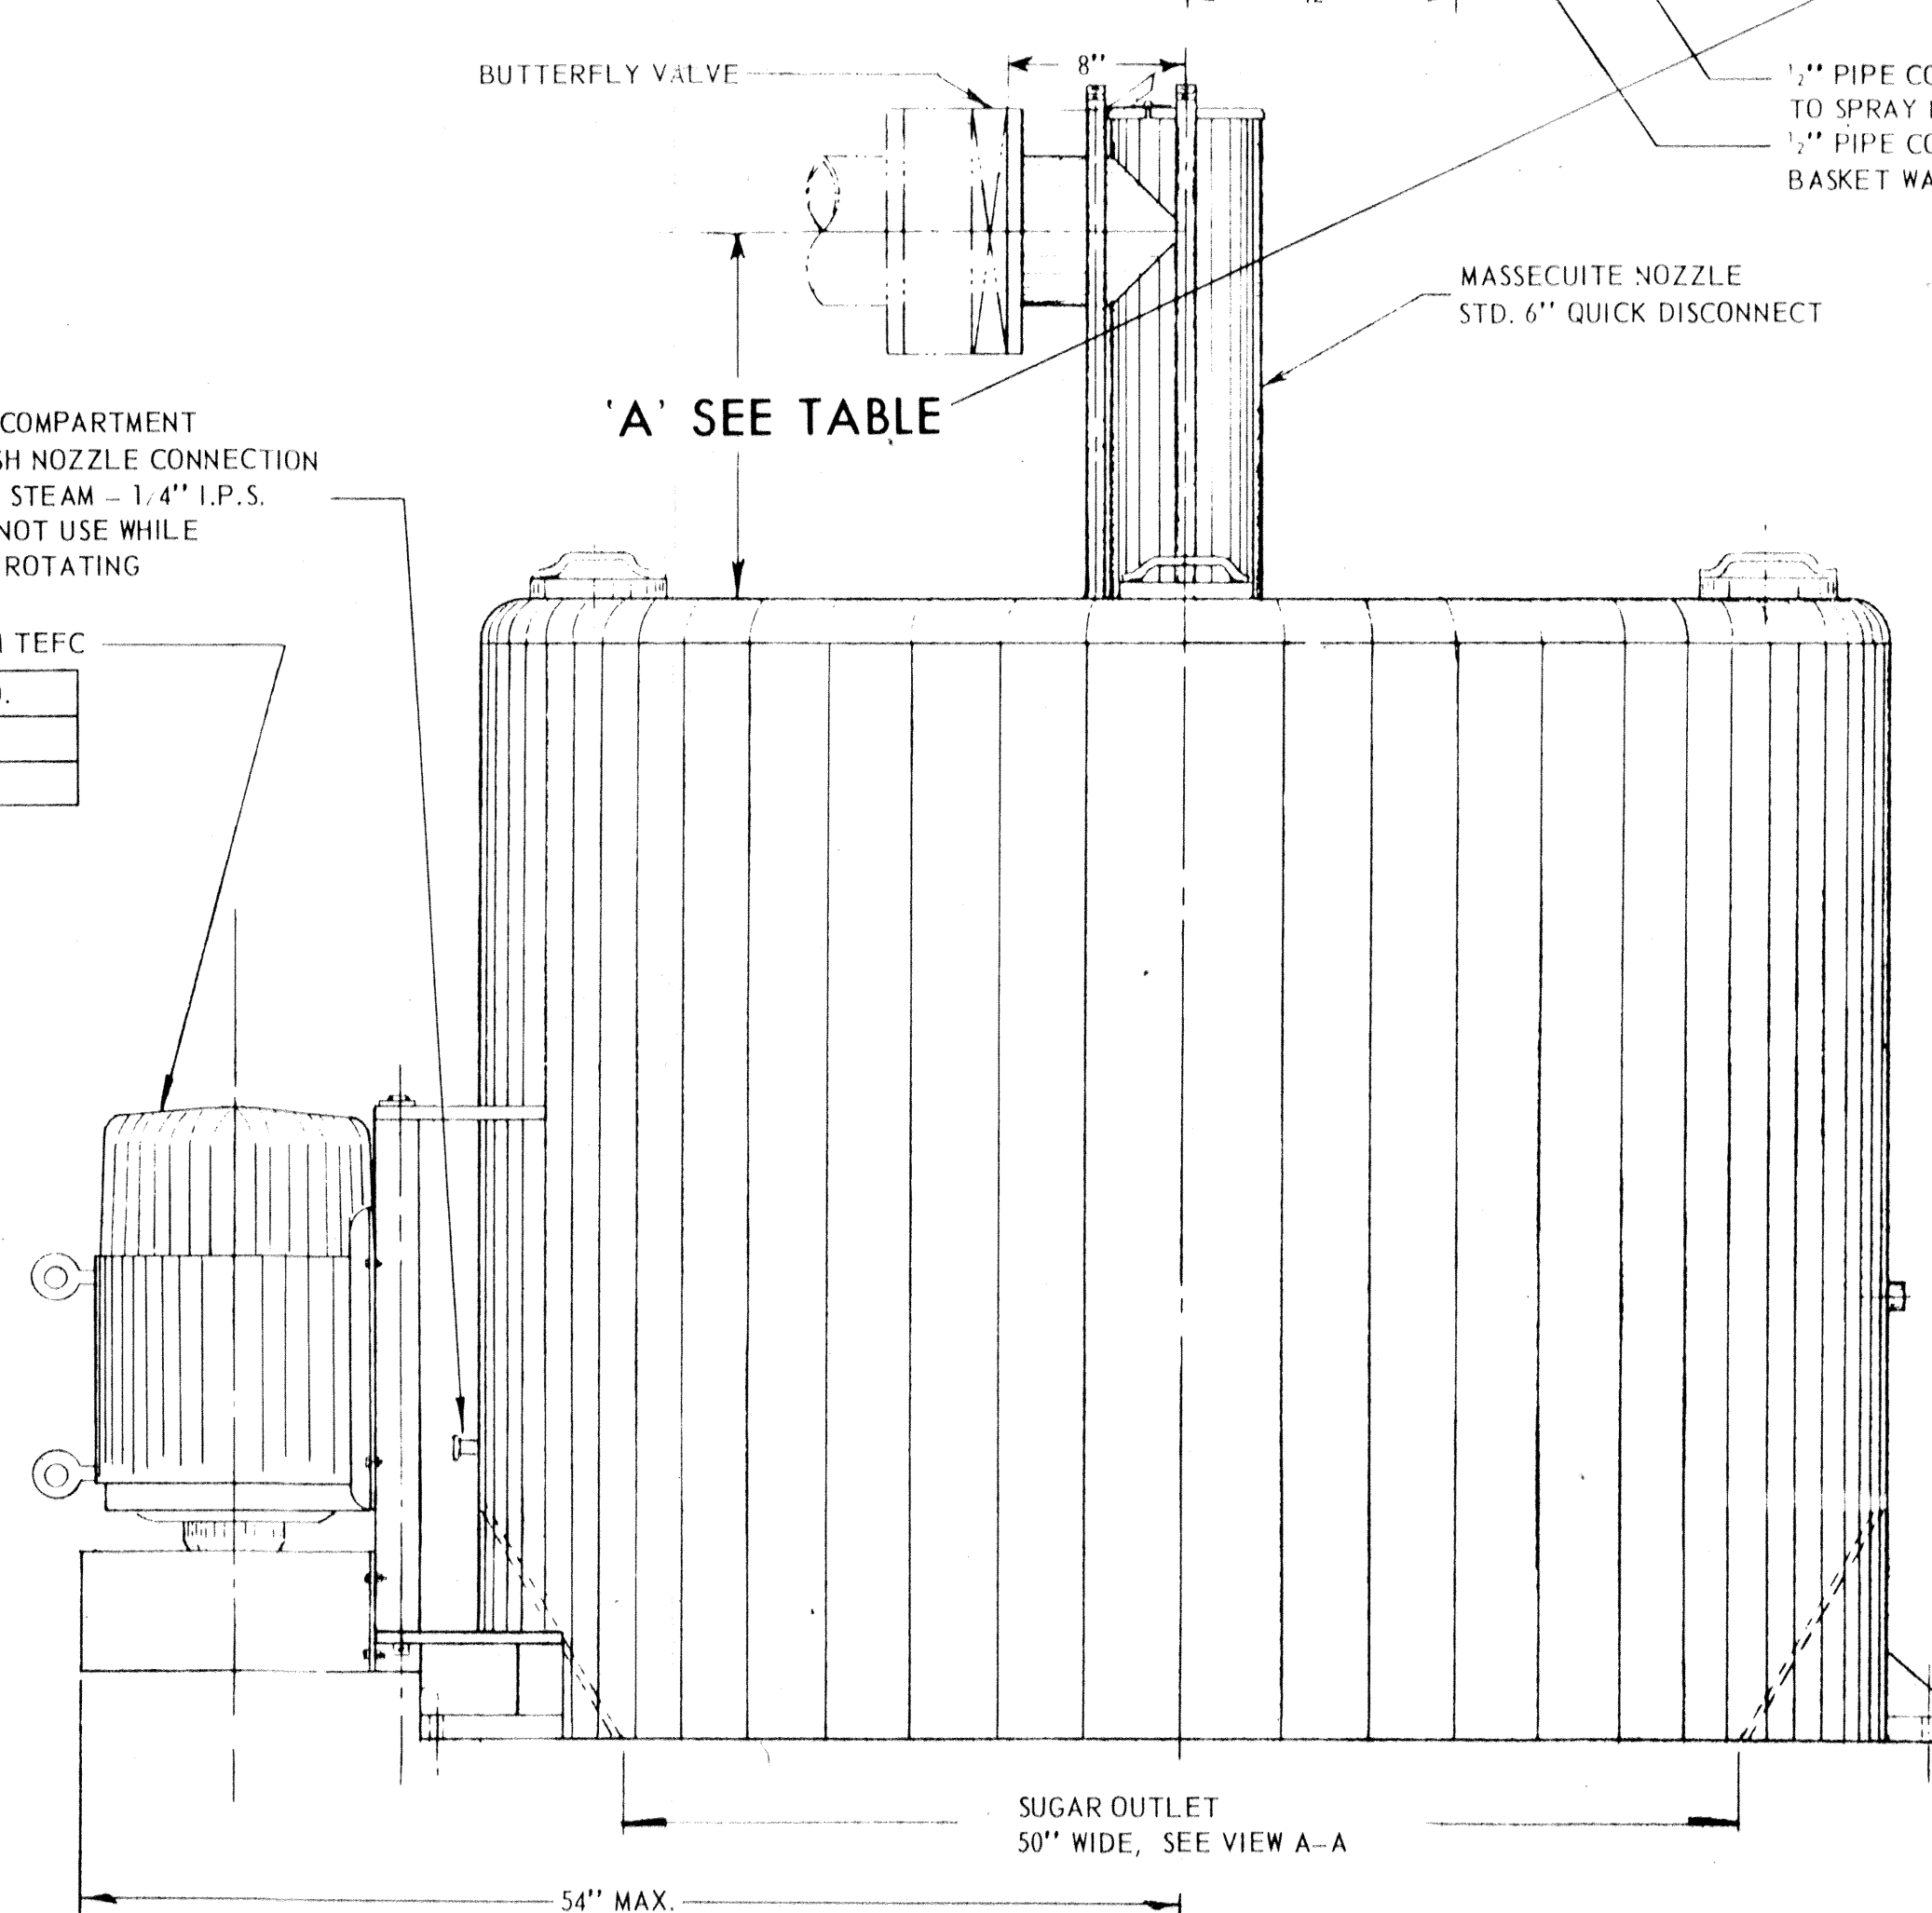

NOTE:
APPROXIMATE WEIGHT 5000 POUNDS
SHIPPING VOLUME - 256 CUBIC FEET

CARLTON PLANT
CN 13604



PATENTS APPLIED FOR

NO.	DATE	REVISIONS	BY
SILVER ENGINEERING WORKS, INC. DENVER, COLORADO			
CONTINUOUS CENTRIFUGAL 58" DIAMETER GENERAL ARRANGEMENT			
DATE	DRAWN		
SCALE	CHECKED		
FILE	66	No. 13483-AM	