


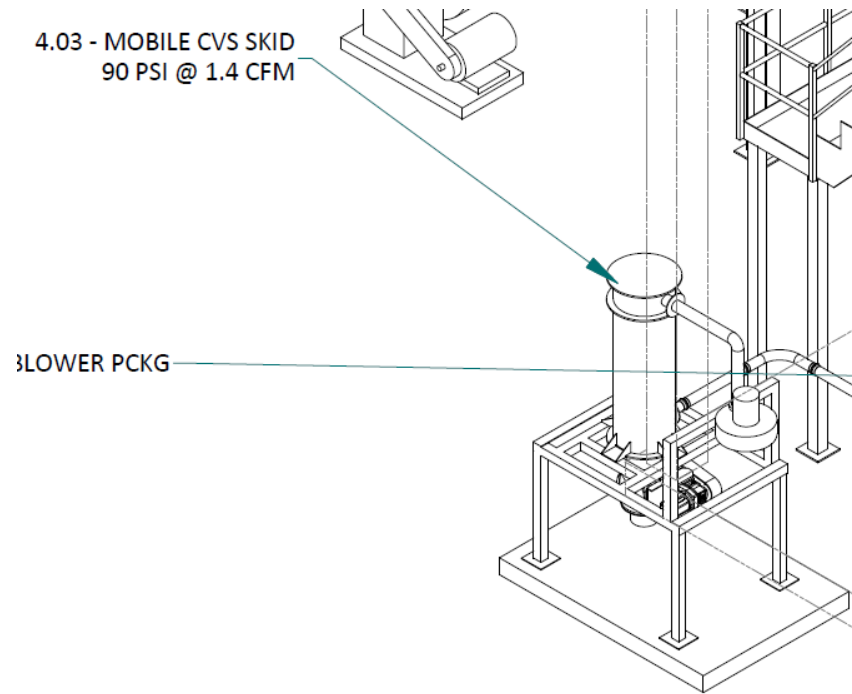

ITEM 4.03
Qty. 2

FPZ BLOWER

COMPLETE WITH:


- 10 hp-575V-60-3 regenerative blower. 3" npt inlet and outlet connections. Class I, Group D, Class II Groups F & G explosion proof motor. Blower castings are anodized for corrosion resistance and impregnated with polyester resin to minimize leakage.
- 3" fpt inline filter with polyester element.
- Indoor inlet filter - exposed polyester element
- Calibration of safety valve for VACUUM service. Valve will be set at 10" H2O below the maximum rated vacuum of the blower
- Silencer - Steel - Male x Endmount - GAS threads
- Vacuum Gauge - 0-200" H2O - 2.5" dial 1/4" backmount
- Safety valve - 2" npt
- Stainless steel identification tag







MANUFACTURER: SCHENCK PROCESS LLC
SERVICE: 575 VAC / 20 AMP / 3 PHASE / 60 HERTZ
FULL LOAD AMPS: 12.8 AMPS
LARGEST MOTOR FULL LOAD AMPS: 11 AMPS
SHORT CIRCUIT CURRENT: 30KA RMS SYMMETRICAL, 575V MAXIMUM
SERVICE CONDUCTORS: COPPER, 75 DEGREE C INSULATION
ENCLOSURE: TYPE 4X
UL FILE NO.: E134284
DRAWING #: =1100101957+CVACP2/2A06, 2A10, 2A11

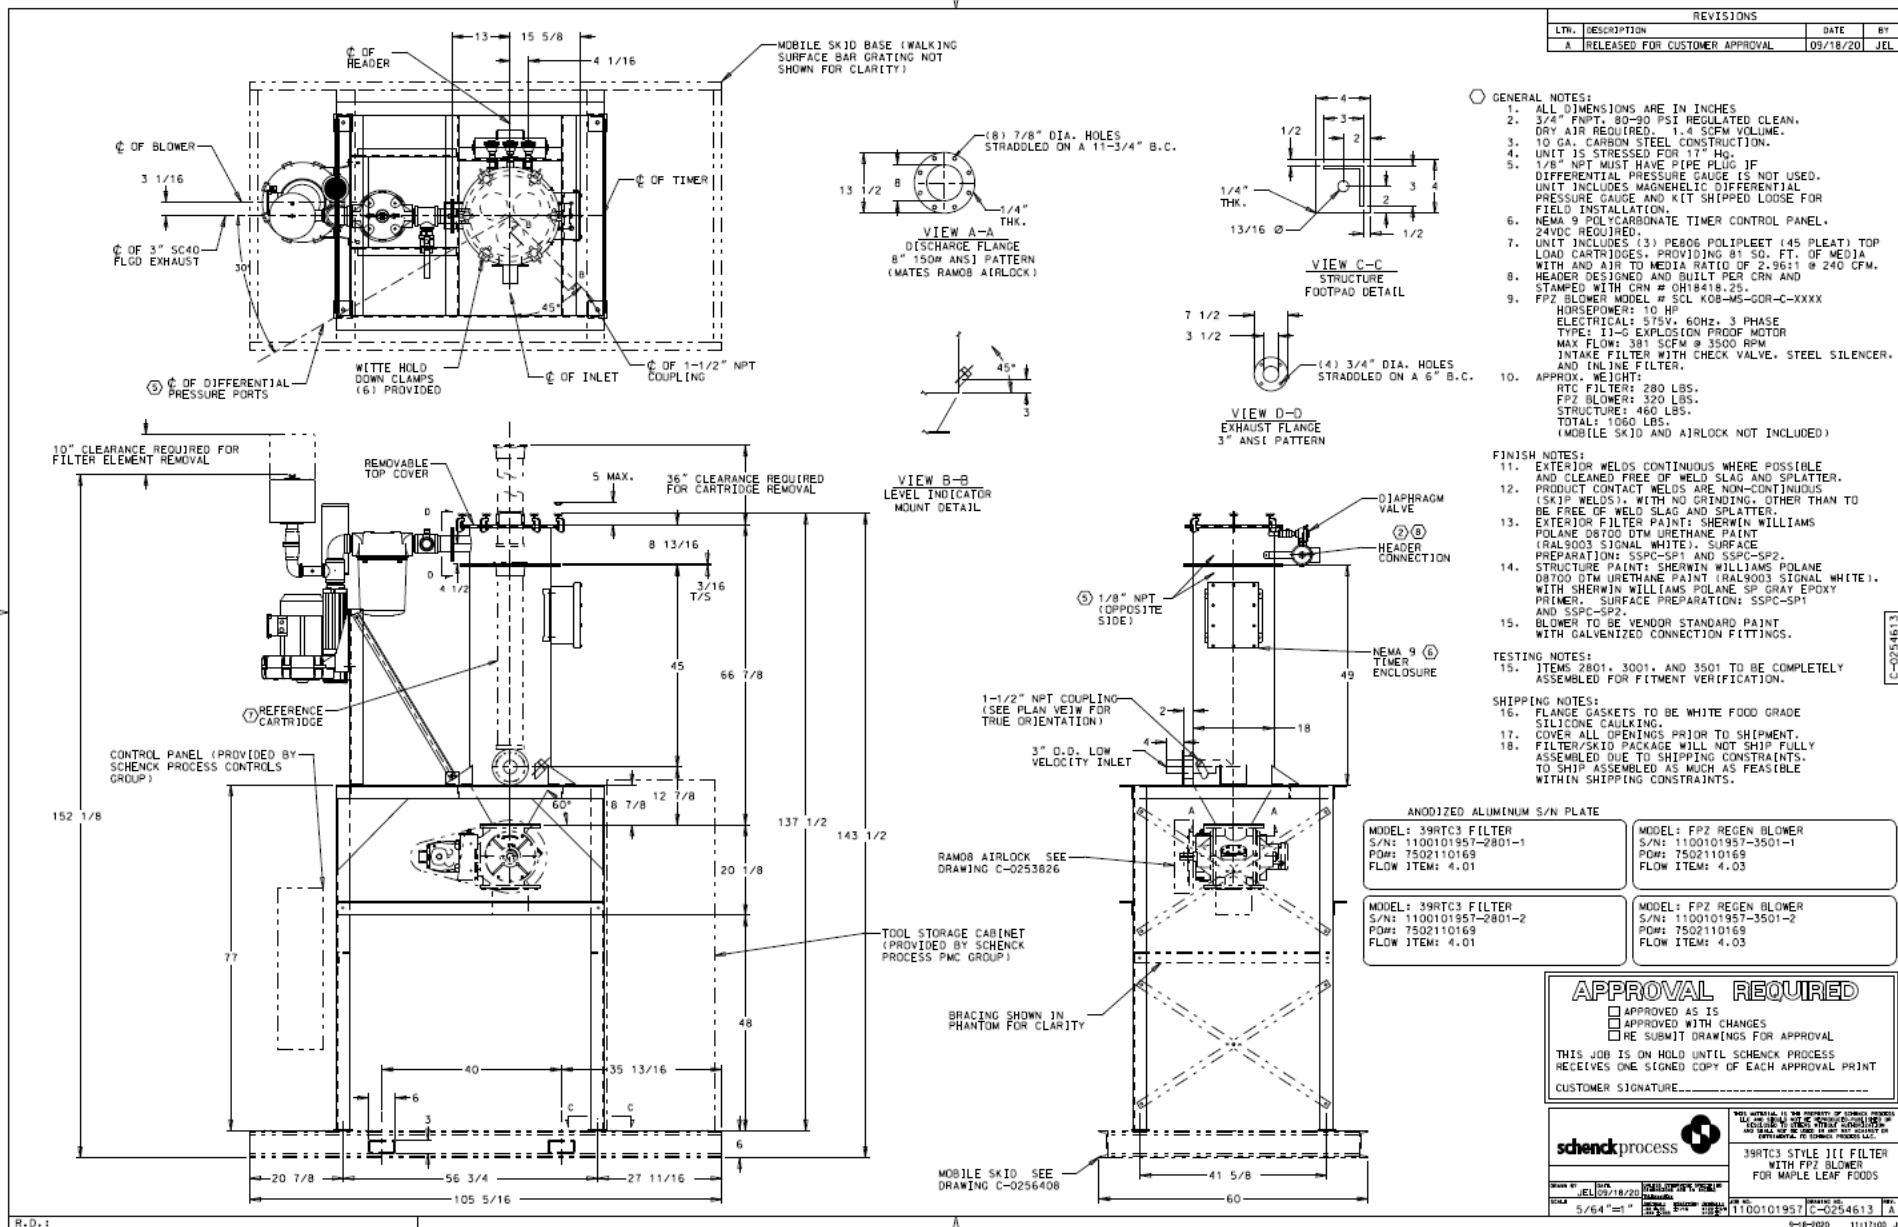

R.D.1

A

9-16-2020 11:17:00 JEL