


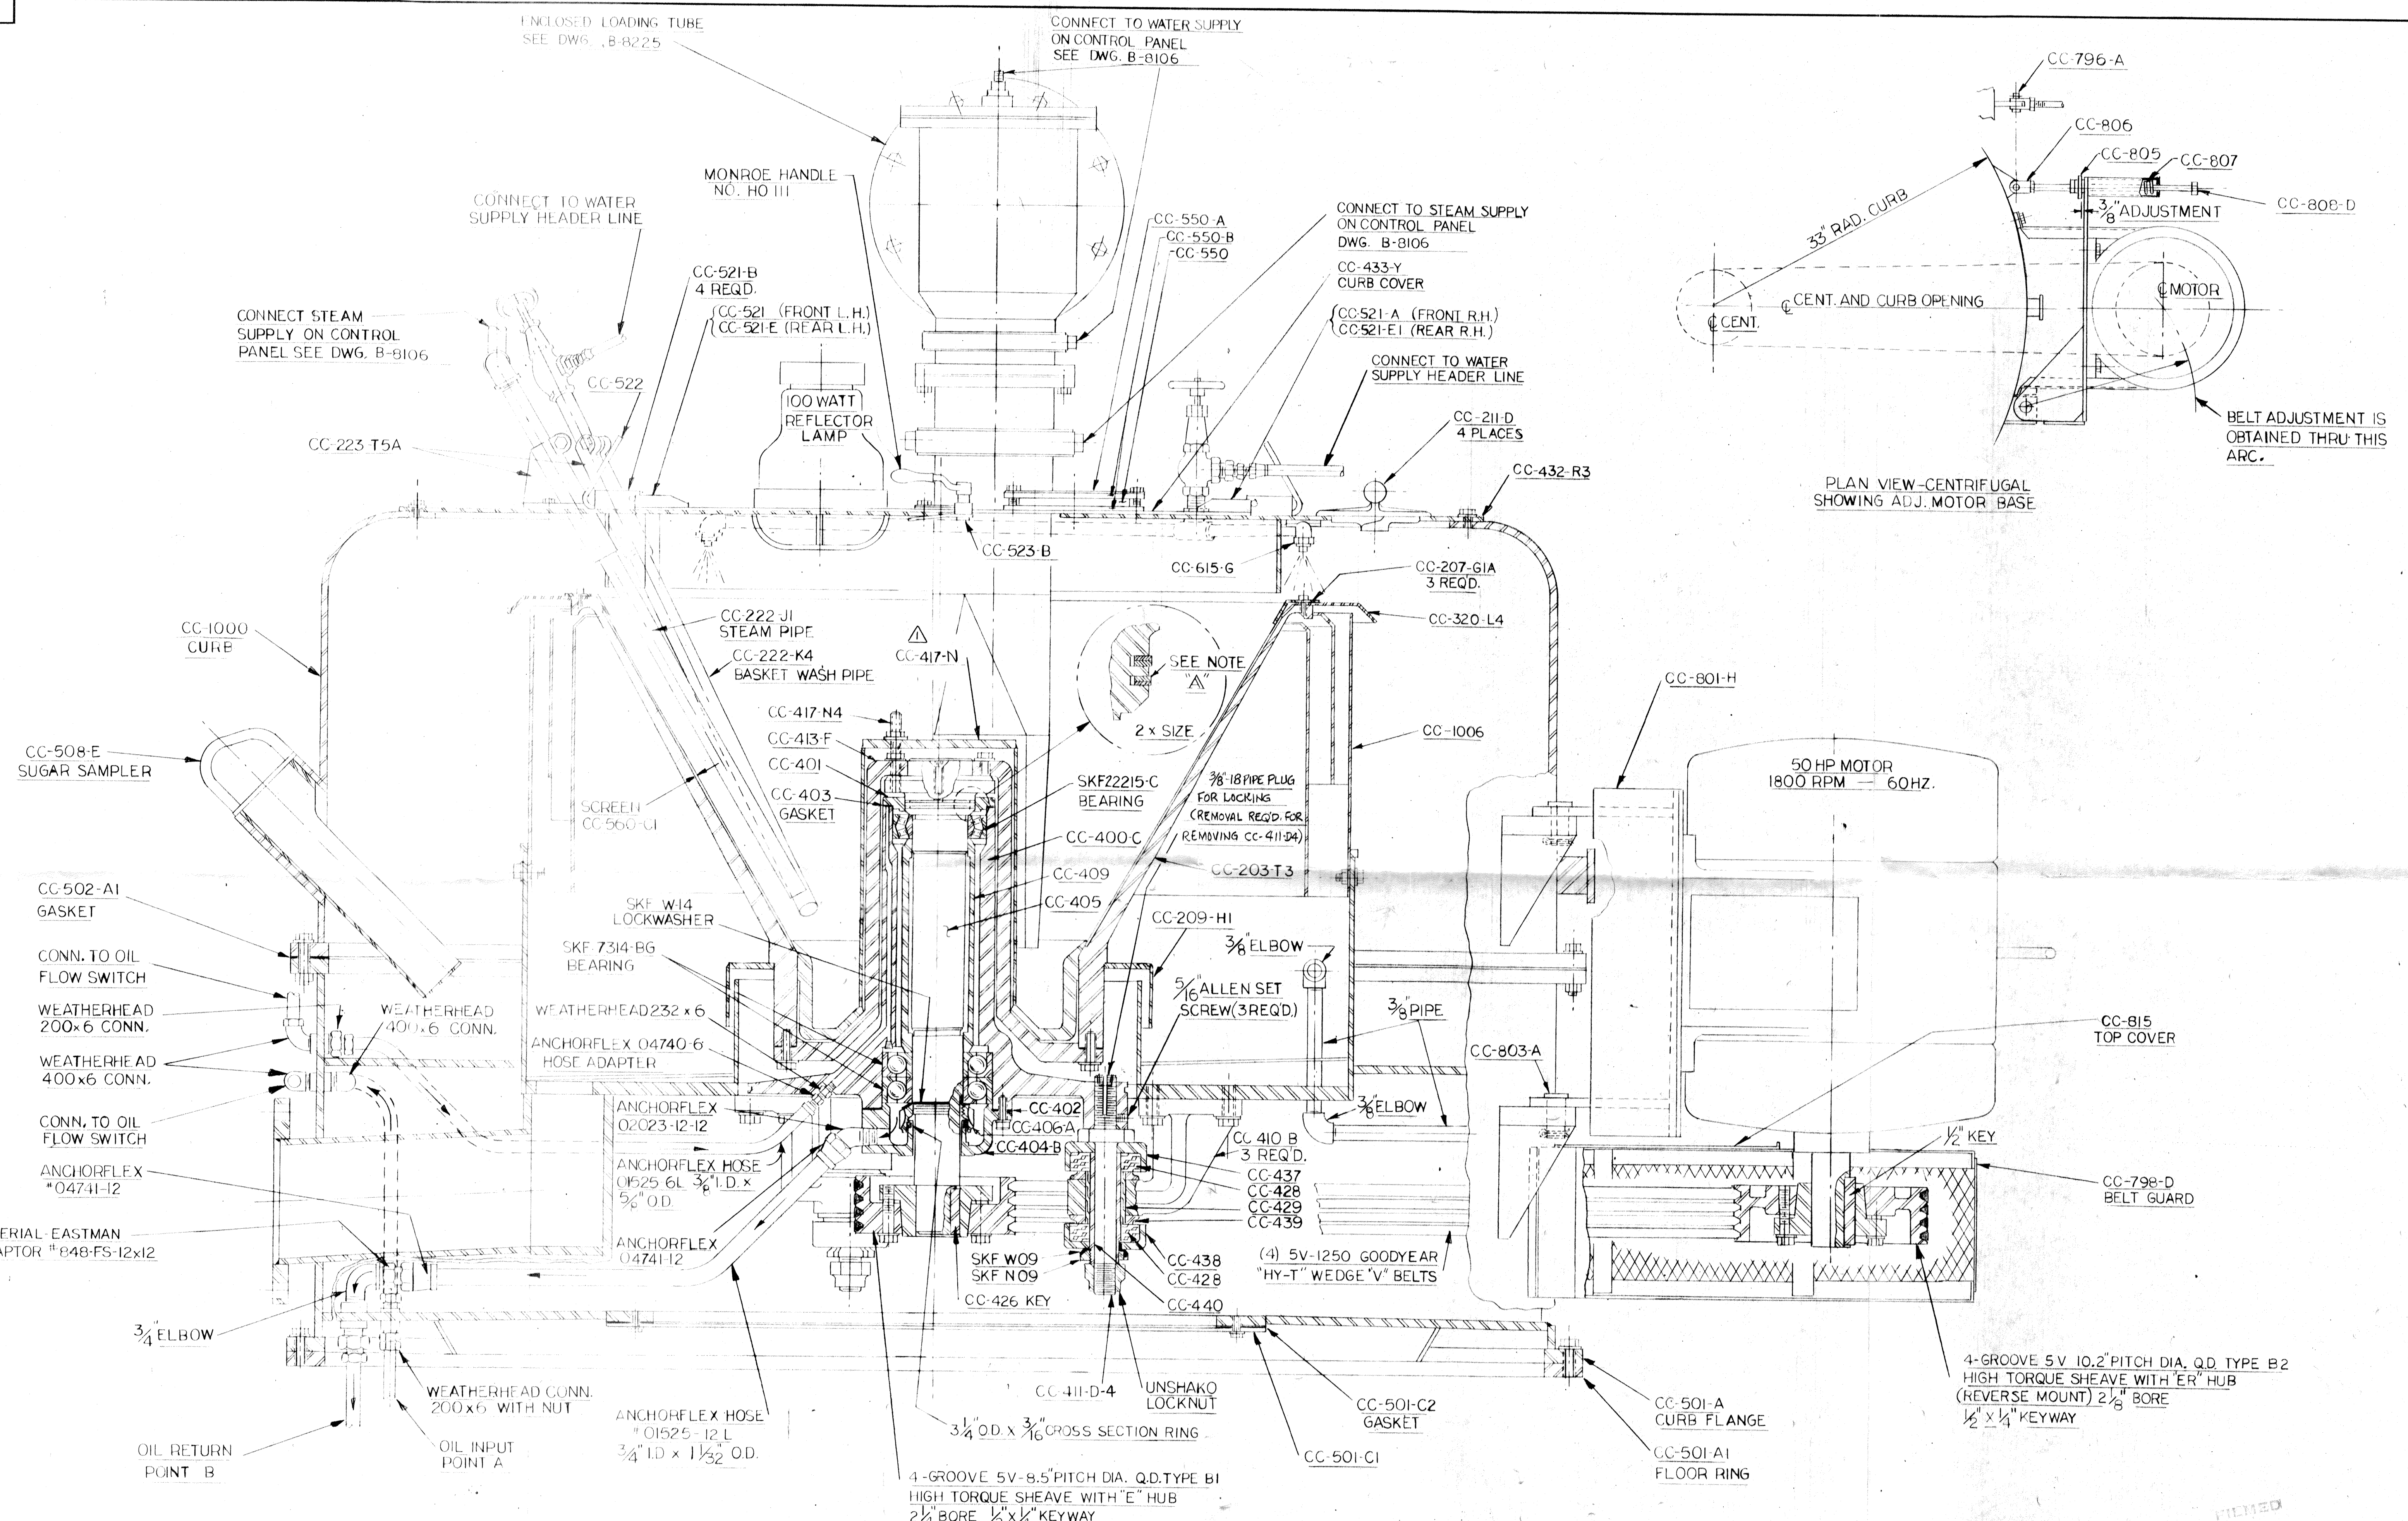

TYPICAL SECTION

NOTE A 3/4 x 5/64 CROSS SECTION RING
USE 1/2 OIL AND ONE COMPRESSION RING IN
EACH GROOVE AS SHOWN

TOLERANCES: — ± .010 ON MACHINED FRACTIONAL DIMENSIONS		60 HZ. DRIVE MOTOR	
REVISIONS AND DATE		CONTINUOUS CENTRIFUGAL ASSEMBLY 37" x 30°	
1	Was CC-417-R1 10-10-75	FIRST ON JOB NO. 79785	
2	Was CC-411-D	THE WESTERN STATES MACHINE CO. HAMILTON, OHIO	
		REVIEWED BY <i>[Signature]</i> CK. <i>[Signature]</i> APP. <i>[Signature]</i>	DATE 2-4-74 B-8104